


Greenhouse Foundation / Slab

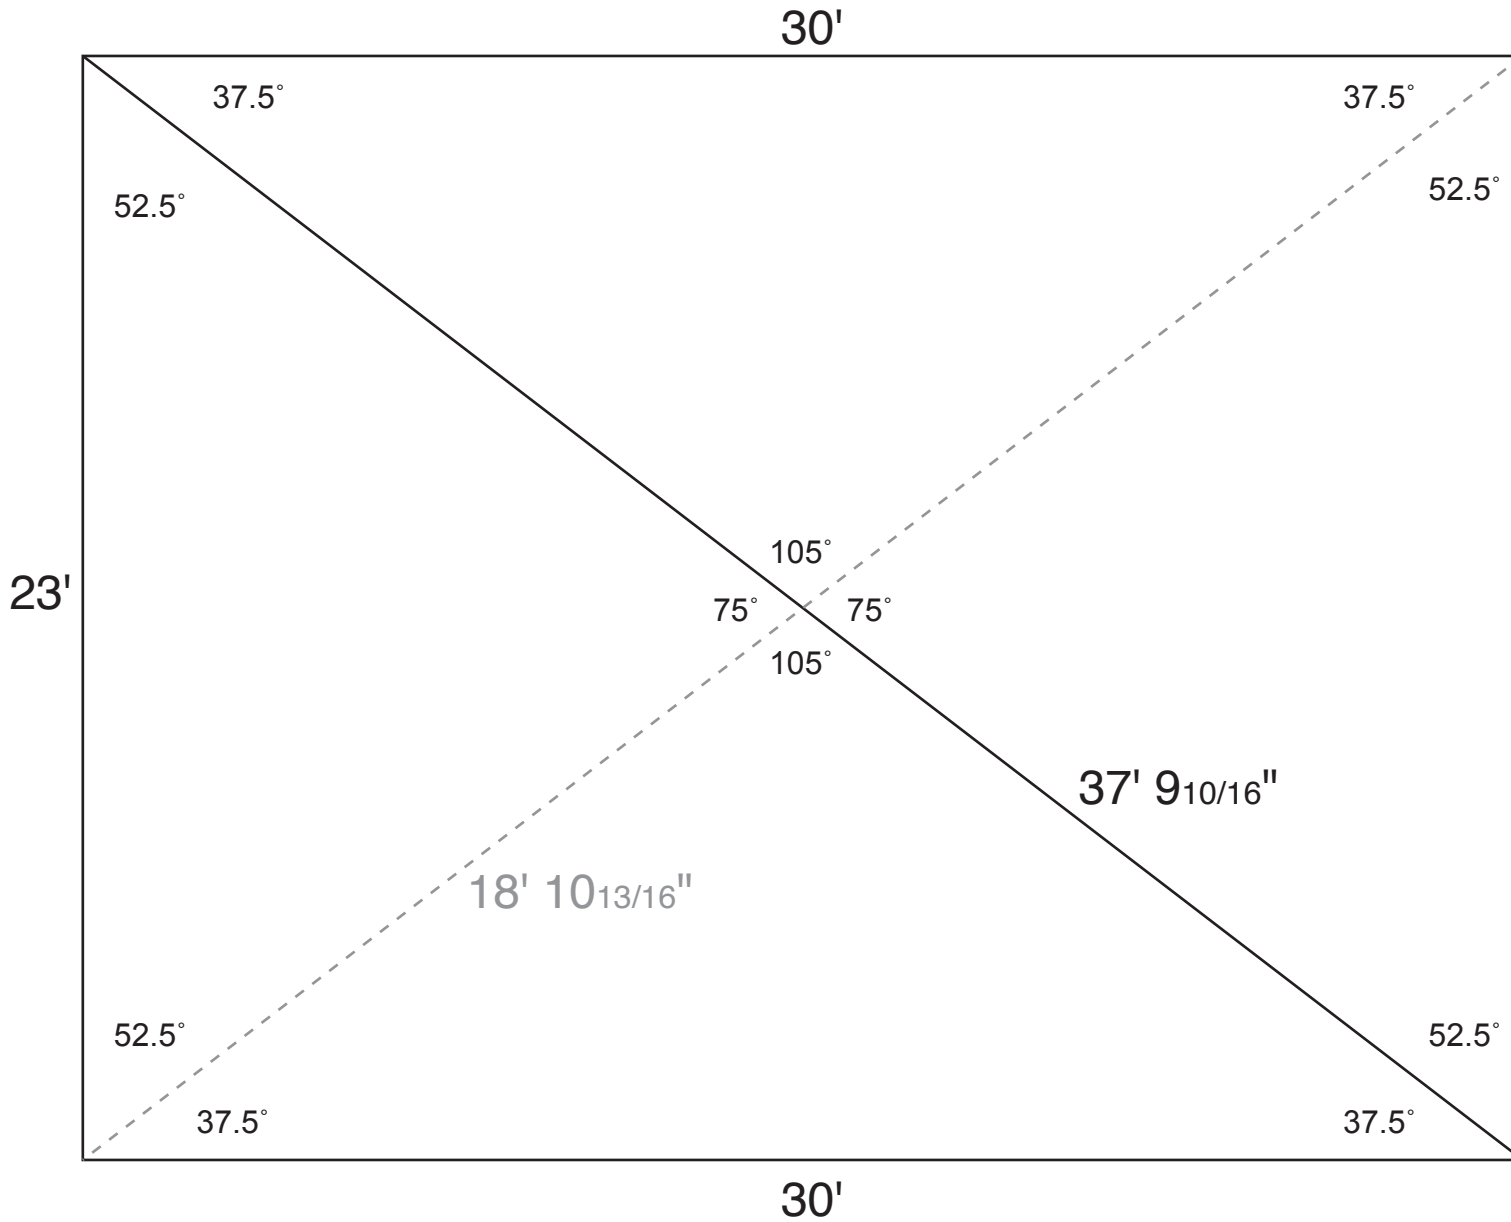

Footing

106 linear feet
12"w x 18"d
159 cubic feet
+13.25 cubic feet ("slope")
= 172.25 cubic feet
= 6.38 cubic yards

Slab

690 sq. feet.
4" thick
229.77 cubic feet
= 8.51 cubic yards

Total Concrete

= 14.89 cubic yards

Greenhouse Foundation

August 7, 2007

© 2007 ByExample.com